




Velcro Batten Tensioners

Pineapple Sails

2526 Blanding Avenue, Alameda, CA 94501 (510) 522-2200 FAX (510) 522-7700

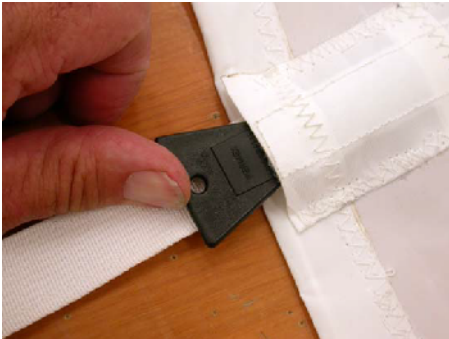

1

Insert the batten into the pocket.



4

Use the batten tool to push the webbing-velcro tab into the batten pocket. The tool will prevent the velcro from sticking together.



2

Be sure the batten is seated all the way into the pocket.



5

Press the batten tool firmly into the pocket. As you extract the tool, press the velcro together.



3

Insert the 'Batten Tool' into the small receptacle on the webbing-velcro tab.



6

When the tool is completely removed, rub the velcro together. The small extraction string should be left hanging out of the pocket.